


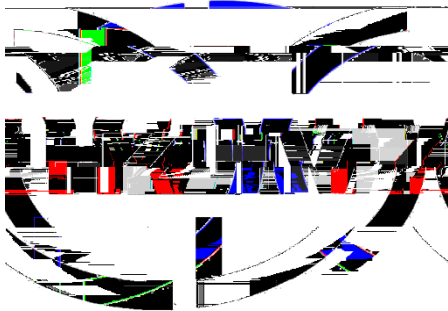

CT5615 5H € uLì#{B

° _?ô93

- Q +e0 ° 9L€ œ (¼ ë ¼ 0 ¢ 9 8

I PQ B K. ®99

.007 Tc -0.007 Tw -[(057)13.6 (1)]TJ 0 c -OTw -(-Tj 0-.007 Tc -.0014Tw -5507 -OTw [(8)-13.7 (99)-13.7 (35)-13.7 (60)-13.7 (0/-13.7 (60)-13.7

5 =1 %&i p #è ¬ t/p ž H =/p , ~ Ò D t >

6 = Í L+, `` !73 Ñ · p >

7 = °73 L0A ÜQ

´1 µ - ?K7 Ð ! ¢ Õ73 >

´2 µ!V Á Õ73 ´+k"–!V Á , , ž8 Þ © p µ»

´3 µ ^#w {+k , {% 8 ' >

8 = % C {+k 1000!W,°K8/ñ †+k"– ,Gf ? °73 L {+k315 , ,Kµ+k"–,° µ+^ 5 3 >

9 = %F?Gf µ+^)å 1\$µ Ü#•H , , õ Ä ¼@ 5 5N †,°-U Ô ')å 1 >

f+k ž	1	EÉ ›+k Á AC220V±10%
	2	EÉ ›NÇ)½ 50Hz±5%
	3	EÉ 0-#W+k Á DC8.4V